

ROSHAK

PACKAGING

DESIGNER AND MANUFACTURER OF
INDUSTRIAL JUMBO BAG & BIG BAG

Version 2016



www.roshakpack.com

www.roshakpack.com

ROSHAK
PACKAGING

ROSHAK

ROSHAK MINERAL AND INDUSTRIAL PACKAGING INDUSTRIES

**DESIGNER AND MANUFACTURER
OF INDUSTRIAL JUMBO BAG &
BIG BAG**



ROSHAK PACKAGING
www.roshakpack.com

ROSHAK PACKAGING

صنایع بسته بندی روشاک طراحی و تولید کننده F.I.B.C با همکاری بزرگترین و معتبرترین تولید کننده پارچه های پلی پروپیلن با گرید بالا در ایران ارائه دهنده انواع جامبو بگ، بیگ بگ، بگ پالت و اسلینگ بگ می باشد.





Roshak mineral and industrial packaging industries

Producer of Jumbo Bag, Big Bag

We always believe in this principle that we've never had a situation where, although if you're up and be big, but not the best situation and we can and should be able to get to the point of being above.



www.roshakpack.com

bitumen jumbo bag

New packaging for bitumen

**Flexible Intermediate Bulk Container
BigBag Spece & Description**



Ventilated Fabric



Type	size	S.W.L / safe working load
P.T.F	950 . 950 . 1100 mm	1000 kg
Lifting Height	Test Load	S.F / Safety Factor
1200 mm	3000 kg	3.1
Liner quality		Loop
60 micron Thickness P.E liner inserted		50 mm wide four (4) p.p Belts All Around The back(full Loop)
Test certificate		

Test certificate is attached in Accordance with Above standard

Ventilated Fabric

R.P.Bag (V.T.S)

Pallet Type Standard

Flexible Intermediate Bulk Container JumboBag Spece & Description



Top

Spout Dia 550 . 600 mm
long with dubblespout

Botton

Flat



Type	size	S.W.L / safe working load
P.T.S	950 . 950 . 130 mm	800 kg
Lifting Height	Test Load	S.F / Safety Factor
1600 mm	4000 kg	5.1
Body Fabric	Number of lifting Point	
P.P Woven uncoat	Cross Corner Loops	
Test certificate		

Test certificate is attached in Accordance with Above standard

Cement Jumbo Bag

Valve Type Standard

Flexible Intermediate Bulk Container
BigBag Spece & Description



Ventilated Fabric



Top

Spout Dia 600 . 450 mm
long

Bottom

Flat



Type	size	S.W.L / safe working load
V.T.S	900 . 900 . 160 mm	1500 kg
Lifting Height	Test Load	S.F / Safety Factor
1900 mm	4500 kg	4.1
Liner qulity		Number of lifting Point
60 micron Thickness P.E liner inserted		Side-Seam Loops
Test certificate		

Test certificate is attached in Accordance with Above standard

Cement Jumbo Bag

Valve Type Standard

**Flexible Intermediate Bulk Container
BigBag Spece & Description**



Ventilated Fabric



Top

spout Dia 600 . 450
mm long

Botton

Flat



Type	size	S.W.L / safe working load
V.T.S	950 . 950 . 1400 mm	1500 kg
Lifting Height	Test Load	S.F / Safety Factor
1800 mm	4500 kg	4.1
Liner quility		Number of lifting Point
60 micron Thickness P.E liner inserted		Side-Seam Loops
Test certificate		

Test certificate is attached in Accordance with Above standard

R.P.Bag (P.T.F)

Pallet Type Full Belt

Flexible Intermediate Bulk Container
BigBag Spece & Description




Ventilated Fabric



Top

Spout Dia 550 . 500
mm long



Bottom

Spout Dia 450 . 500 mm
long with full spout



Type	size	S.W.L / safe working load
P.T.F	900 . 900 . 1100 mm	1500 kg
Lifting Height	Test Load	S.F / Safety Factor
1400 mm	7500 kg	5.1
Liner quality	Number of lifting Point	
60 micron Thickness P.E liner inserted	60 mm wide four (4) p.p Belts All Around The back(full Loop)	
Test certificate		

Test certificate is attached in Accordance with Above standard

R.P.Bag (V.T.S)

Valve Type Standard

**Flexible Intermediate Bulk Container
JumboBag Spece & Description**



Ventilated Fabric



Top | Spout Dia 500 . 450 mm

Bottom

Spout Dia 500 . 450
mm long with full spout



Type	size	S.W.L / safe working load	
V.T.S	900 . 900 . 2200 mm	1000 kg	
Lifting Height		Test Load	S.F / Safety Factor
2500 mm		3000 kg	3.1
Body Fabric			Number of lifting Point
P.P Woven uncoat with black color 100% U.V on material of construction 200 gr/m2 Belt material and Thread matrial of Stitches			Side-Seam Loops

Test certificate

Test certificate is attached in Accordance with Above standard

R.P.Bag (V.T.S)

Q-Bag / BaffleBag

Flexible Intermediate Bulk Container
JumboBag Spece & Description



Ventilated Fabric



Top

Spout Dia 550 . 500 mm
long

Bottom

Spout Dia 450 . 500
mm long with full spout



Type	size	S.W.L / safe working load
Q-V.T.S	1050 . 1050 . 2250 mm	1000 kg
Lifting Height	Test Load	S.F / Safety Factor
2500 mm	3000 kg	3.1
Body Fabric		Number of lifting Point
P.P Woven uncoat with black color 100% U.V on material of construction 200 gr/m2 Belt material and Thread matrial of Stitches		Side-Seam Loops
Test certificate		

Test certificate is attached in Accordance with Above standard

Ventilated Fabric

R.P.Bag (P.T.F) - Cement Sling Bag

Pallet Type Full Belt

**Flexible Intermediate Bulk Container
BigBag Spece & Description**



Top | Open top



Bottom | Open top

Type	size	S.W.L / safe working load
P.T.F	1000 . 1200 . 1000 mm	1500 kg
Lifting Height	Test Load	S.F / Safety Factor
1300 mm	3000 kg	3.1
Liner quality		Number of lifting Point
60 micron Thickness P.E liner inserted		60 mm wide four (4) p.p Belts All Around The back(full Loop)
Test certificate		

Test certificate is attached in Accordance with Above standard

R.P.Bag (V.T.S) - Cement Sling Bag

Valve Type Standard

Flexible Intermediate Bulk Container
BigBag Spece & Description



Ventilated Fabric



Top | Open top

Bottom | Open top



Type	size	S.W.L / safe working load
V.T.S	1000 . 1200 . 1000 mm	1500 kg
Lifting Height	Test Load	S.F / Safety Factor
1300 mm	3000 kg	3.1
Liner quilty		Number of lifting Point
60 micron Thickness P.E liner inserted		Side-Seam Loops
Test certificate		

Test certificate is attached in Accordance with Above standard

R.P.Bag (V.T.S)

Q-Bag/BaffleBag

**Flexible Intermediate Bulk Container
BigBag Spece & Description**



Ventilated Fabric



Top

Spout Dia 550 . 500 mm
long with dubble spout

Bottom

spout Dia 600 . 550
mm long with full spout



Type	size	S.W.L / safe working load
Q-V.T.S	1050 . 1050 . 1350 mm	1000 kg
Lifting Height	Test Load	S.F / Safety Factor
1700 mm	5000 kg	5.1
Test certificate		Number of lifting Point
Test certificate is attached in Accordance with Above standard		Side-Seam Loops

R.P.Bag (P.T.S)

Pallet Type Standard

**Flexible Intermediate Bulk Container
BigBag Spece & Description**



Ventilated Fabric



Top | Spout Dia 550 . 600 mm
long with dubbie spout

Bottom

Spout Dia 400 . 500 mm
long with full spout



Type	size	S.W.L / safe working load
P.T.S	950 . 950 . 1450 mm	1000 kg
Lifting Height	Test Load	S.F / Safety Factor
1700 mm	5000 kg	5.1
Top Periphery		Number of lifting Point
300 mm wide P.P Belt Attached		Cross Corner Loops
Test certificate		

Test certificate is attached in Accordance with Above standard

R.P.Bag (V.T.S)

Valve Type Standard

Flexible Intermediate Bulk Container JumboBag Spece & Description



Ventilated Fabric



Top

Spout Dia 550 . 600 mm
long with dubblespout

Botton

Flat



Type	size	S.W.L / safe working load
V.T.S	800 . 800 . 1100 mm	1000 kg
Lifting Height	Test Load	S.F / Safety Factor
1400 mm	5000 kg	5.1
Body Fabric		Number of lifting Point
P.P Woven uncoat		Side-Seam Loops
Test certificate		

Test certificate is attached in Accordance with Above standard


R.P.Bag (P.T.S)

Singel Loop

Flexible Intermediate Bulk Container
BigBag Spece & Description



Ventilated Fabric

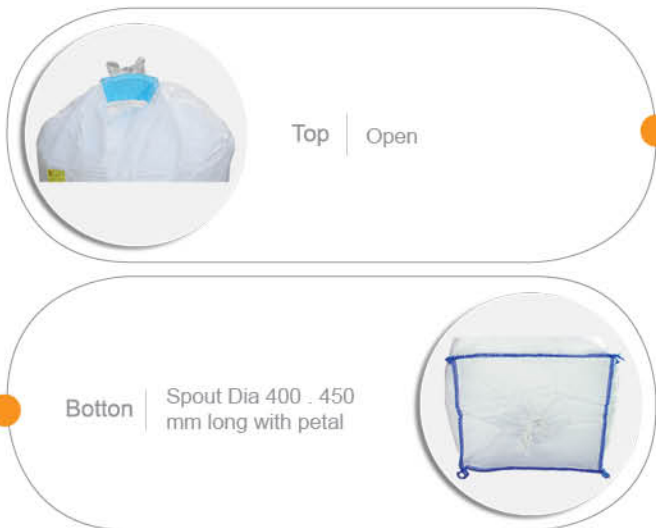

Type	size	S.W.L / safe working load
P.T.S	750 . 750 . 1250 mm	750 kg
Lifting Height	Test Laod	S.F / Safety Factor
1500 mm	2500 kg	5.1
Liner quilty	Number lifting Point	
60 micron Thickness P.E liner inserted	Singel Loop	
Test certificate		

Test certificate is attached in Accordance with Above standard

R.P.Bag (V.T.S)

Valve Type Standard

**Flexible Intermediate Bulk Container
JumboBag Spece & Description**



Ventilated Fabric



Top

Spout Dia 550 . 600 mm
long with dubble spout

Bottom

Spout Dia 400 . 450
mm long with petal



Type	size	S.W.L / safe working load
V.T.S	950 . 950 . 1450 mm	750 kg
Lifting Height	Test Load	S.F / Safety Factor
1750 mm	4000 kg	5.1
Liner quilty		Number of lifting Point
60 micron Thickness P.E liner inserted		Side - Seam Loops
Test certificate		

Test certificate is attached in Accordance with Above standard


Send Type

DESIGNER AND
MANUFACTURER OF
INDUSTRIAL JUMBO
BAG & BIG BAG



ROSHAK PACKAGING

www.roshackpack.com

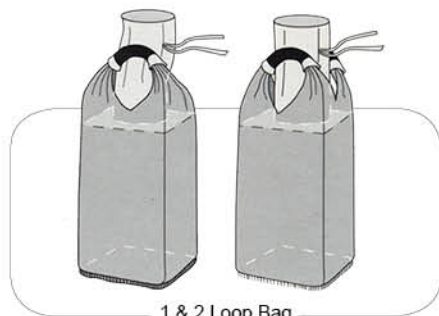


1 & 2 Loop Bag


روشاک

طراح و تولید کننده بیگ بگ پلی پروپیلن


ROSHAK
Flexible Container Ventilated Fabric

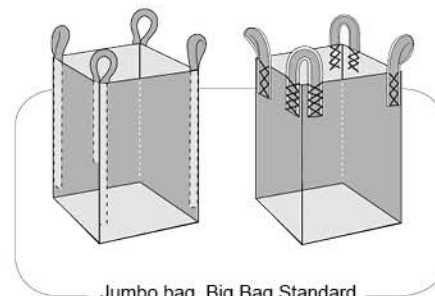


Jumbo bag, Big Bag Standard

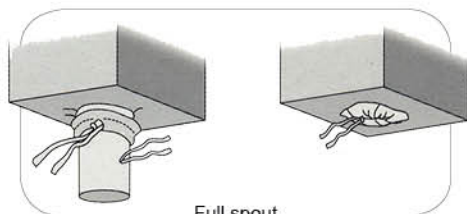


Full spout
تخلیه با قیف حفاظت شده

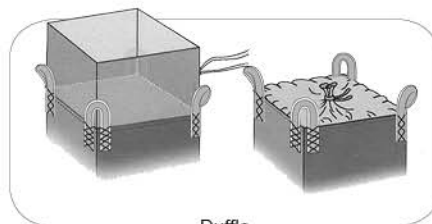


Duffle
دریچه لیفه ای

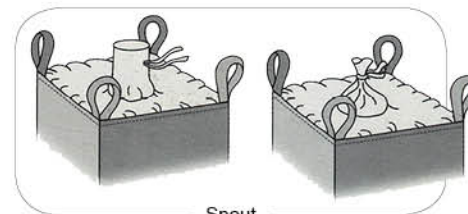


Spout
دریچه قیف دار

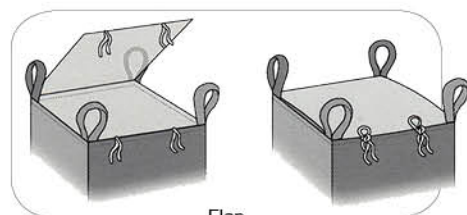

Flap
درپوش بند دار

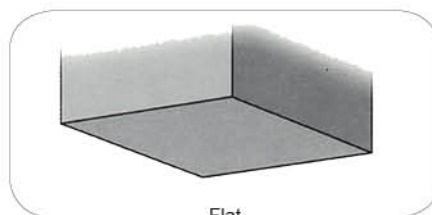

Flat
کف بسته

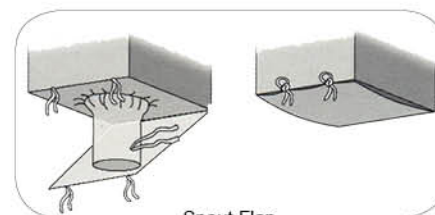

Spout Flap
تخلیه با قیف و درپوش

www.roshakpack.com





ROSHAK PACKAGING

آدرس : اراک. صندوق پستی : ۱۳۸۹

تلفن : ۳۲۲۲۱۸۵۴-۳۲۲۲۱۸۹۸ (۰۸۶)

www.roshakpack.com

sales@roshakpack.com